

Timing Mode: **DELAY ON MAKE**
 Category: **TIMER SOLID STATE, 10 AMPS**
 Series: **TH3XC**



PELCO COMPONENT TECHNOLOGIES • 855 227 3526


SOLID STATE TIMER, HIGH POWER



TH3XC Timers

TH3XC series solid state timers deliver reliable performance in high power applications, with a heat sink that spans the entire base of the unit.

TH3XC timers provide Delay On Make function and offer four time setting options: adjustable via integral or external pot, factory fixed internal, or fixed via external resistor.




Full base heat sink

Set variable time periods from 0.1 second up to 24 hours. Specify fixed time periods in full seconds or hours.


Delay On Make

Application of input voltage to the timer starts the time delay.
 At the end of the time delay, the load is energized.
 To reset, remove the input voltage to the timer.

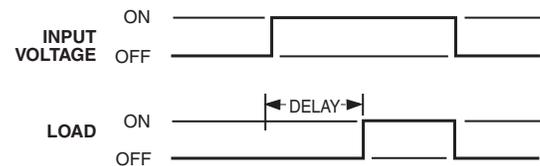

FEATURES

- Digital timing, solid state output
- 10 Amp continuous current handling
- 60 Amp AC single-cycle surge handling
- Factory fixed, variable or external timing adjustment
- ±0.5% Repeat accuracy under fixed conditions
- Surface mount with two #8 or #10 screws
- Standard .25" QC terminals
- Totally encapsulated for protection from harsh environments
- 100% operational testing
-  RoHS compliant

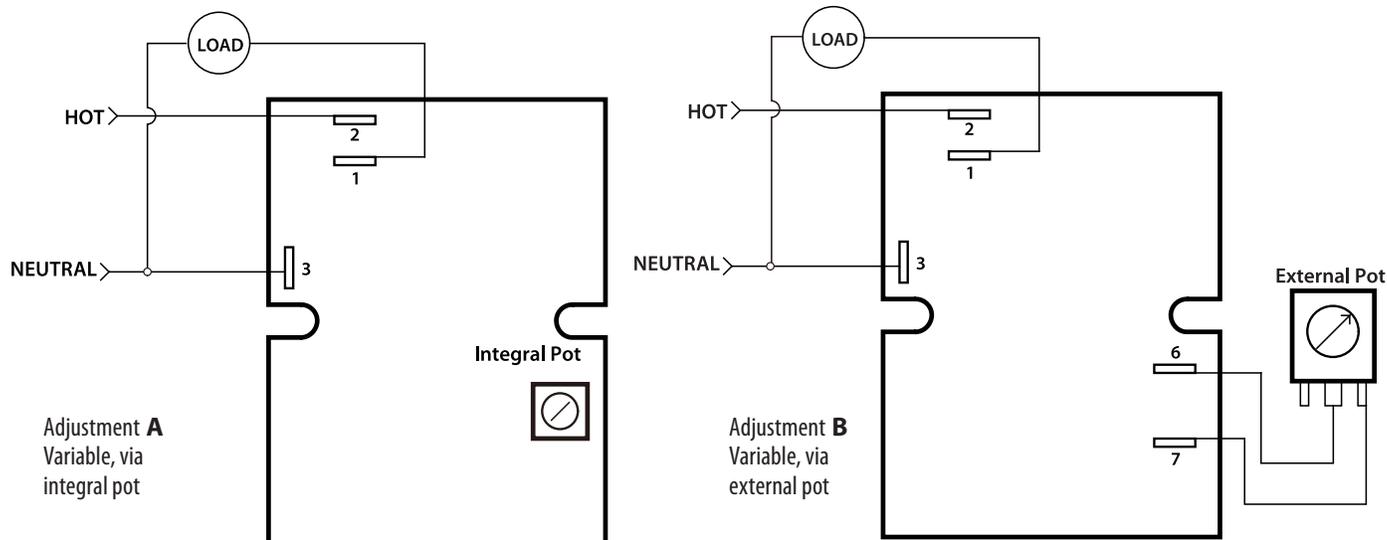

SPECIFICATIONS

Input Voltage: 24, 120 or 230VAC±20%; , 50 / 60Hz,
Time delay: Adjustable from 0.1 second to 24 hours
 1 sec., 10 sec., 100 sec., 1000 sec are standard
Special ranges available on request
Repeatability: ±0.5% under fixed conditions
Time delay accuracy: ±10% typical
Reset / Recycle Time: 150 milliseconds maximum
Solid State Output Form: 10 Amps steady state,
 60 Amps inrush, 100 milliAmps minimum load

Life Expectancy No predictable failure if used within operating parameters
Protection: *Transient Protection:* Movistor
Dielectric Strength: 1800VAC RMS
Temperature Ranges: *Storage:* -40°C to +85°C
Operating: -25°C to +65°C
Physical Data: 2" x 2.7" case with heat sink,
 Surface mount with two #8 or #10 screws,
 0.25" QC terminals for input and output

OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Time Adjustment Method	Options
Delay On Make	TH3XC 10 Amps	1 120VAC 50/60 Hz 2 230VAC 50/60 Hz 3 24VAC 50/60 Hz	VARIABLE TIME PERIODS 0001 0.1 to 1 sec. 0010 0.1 to 10 sec. 0100 1 to 100 sec. 1000 10 to 1000 sec. Any range up to 24 hours is available	A Variable, via integral pot B Variable, via external pot C Fixed, internal, factory set D Fixed, via external resistor	S Special
			FIXED TIME PERIODS Specify time in full seconds (S) or hours (H) Examples 400S is 400 seconds 05H5 is 5.5 hours		