

Timing Mode: **DELAY ON MAKE**
Category: **SOLID STATE TIMER**
Series: **THCRU**

ROUND SOLID STATE, WIDE VOLTAGE



THCRU Timers

The THCRU timer is a universal voltage, solid state output unit with digital timing in a one-inch diameter round case.


THCRU offers wide operating voltages of 19–265VAC and 10–120VDC in a single unit. Additional benefits include small size and easy installation and hook-up.

Timing Mode



Application of input voltage to the timer starts the time delay.


At the end of the delay period the load is energized.

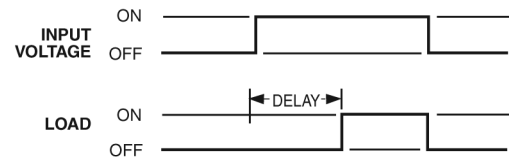To reset, remove the input voltage to the timer.



FEATURES

- Accurate digital timing, solid state output
- 1 Amp current load handling, 10 Amps single cycle surge
- Wide universal operating voltages in a single timer: 19–265VAC and 10–120VDC
- Time delay is factory fixed per customer request
- Repeat accuracy is $\pm 0.1\%$ Set accuracy is $\pm 5\%$
- Totally encapsulated for protection from harsh environments
- 100% operational testing before shipping
-  pending 
- RoHS compliance available

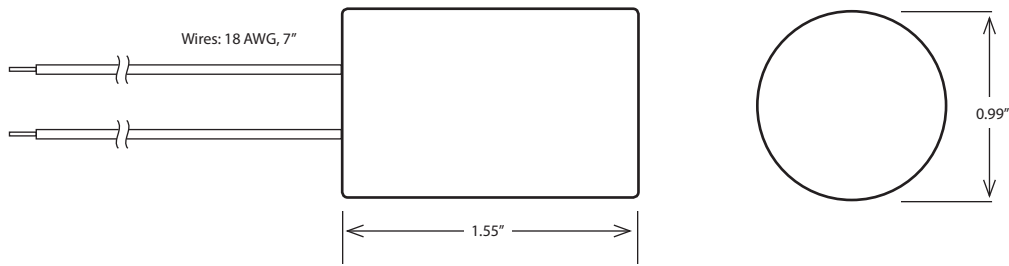

SPECIFICATIONS

Universal Input Voltage: 10–120VDC and 19–265VAC

Repeat Accuracy: ±0.1% under fixed conditions

Time Delay: Factory fixed per customer request
See examples in Options

Reset/Recycle Time: 100 milliseconds

Tolerances: Fixed at ±10% of nominal time

Recycle Effect: None

Temperature Ranges: *Storage:* -40°C to +85°C
Operating: -25°C to +65°C

Life Expectancy: No predictable failure if used within operating parameters

Protection: *Transient Protection:* Internal MOV
Dielectric Strength: 1800V RMS 60Hz

Power Requirements: 0.25 watts max

Solid State Output: SPST (N.O.)

Load Current: 1 amp continuous,
10 amps single-cycle surge

Time Cycle Interrupt: Input voltage break resets timer to original state

OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Factory Fixed Time Delay	Time Adjustment Method	Options
Delay on Make	THCR	U Universal 19–265VAC and 10–120VDC	<i>Examples</i> 001S 1 second 010S5 10.5 seconds 1200S 1200 seconds <i>Any fixed time per customer request</i>	C Fixed, internal, factory set	S Round case with wires

EXAMPLE THCR U 001S C S is a THCRU series timer with 1 second fixed time delay.