

Timing Mode: **REPEAT CYCLE, OFF/ON**


Category: **TIMER WITH RELAY**

Series: **TGK**

## CUBE RELAY, 10-30 AMPS



PELCO COMPONENT TECHNOLOGIES • 855 227 3526

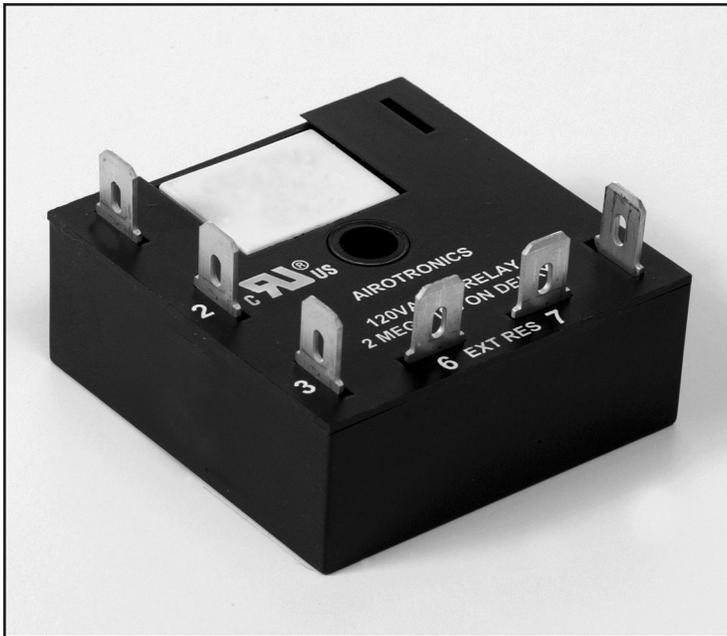

### TGK Timers

TGK series Cube Relay Repeat Cycle Off/On timers are a unique combination of solid state timing circuitry with a relay output in a compact 2" x 2" cube configuration.

These units offer the many advantages of a relay output and provide the same functional performance as plug-in relay timers, but at a significant cost savings.

They are available with output ratings of 10, 20 or 30 amps.


### Timing Mode

Application of input voltage to the timer starts the "Off" time delay.

At the end of the "Off" time delay, the "On" time delay starts and the load is energized.

At the end of the "On" time delay, the load is de-energized, the timer returns to the "Off" time delay, and cycling continues as long as input voltage is applied.

Removal of the input voltage resets the timer.


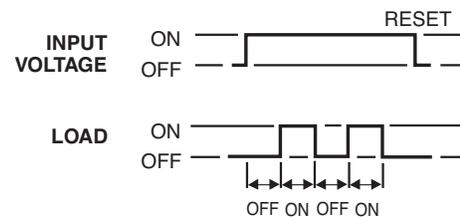


## FEATURES

- High current-carrying capacity up to 30 amps
- 100% Load isolation
- No leakage in N.O. position
- No heat sinking required
- Available in any time delay periods required
- Digital CMOS timing
- Transient protected

- No minimum load required
- Totally encapsulated for protection from harsh environments
- 100% Operational testing before shipping
- 
- RoHS compliant

## BASIC WIRING AND DIMENSIONS

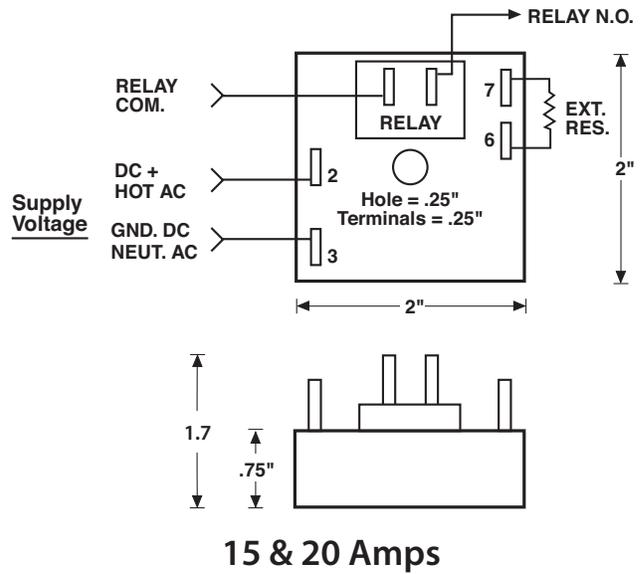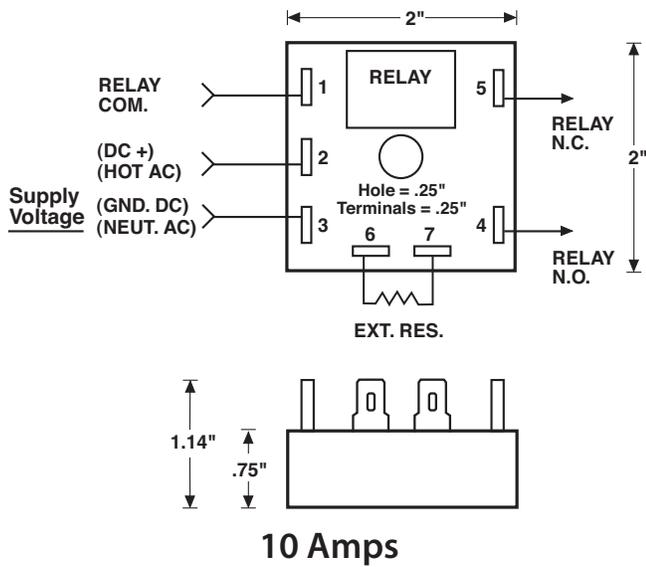

## SPECIFICATIONS

072816

**Input Voltage:** VDC: 12, 24-28, or 48  
 VAC: 24, 48, 120, or 230, 50/60Hz  
 Optional: Any in-between AC or DC voltage

**Time Delay:**  
*Timing Mode:* Repeat Cycle Off/On  
*Type:* Digital CMOS  
*Available Time Range:* 0.1 second to 24 hours  
*Time Adjustment:* Factory-fixed time period;  
 variable, with knob on timer, or  
 terminals for external resistor or  
 potentiometer

**Repeatability:** ±0.5%

**Setting Accuracy:**  
*Fixed time period:* ±10% of nominal time,  
*Variable time range:*  
 +15% max. time, -10% min. time

**Reset/Recycle Time:** 25 milliseconds

**Initiate Time:** 6 milliseconds or less

**Life Expectancy:**  
*Mechanical:* 20 million operations  
*Electrical:* 100,000 operations at maximum load

**Protection:**  
*Polarity Protection:* All DC units have reverse  
 polarity protection  
*Transient Protection:* 18 joules  
*Dielectric Strength:* 1800V RMS 60Hz

**Temperature Ranges:**  
*Storage:* -40°C to +85°C  
*Operating:* -25°C to +65°C

**Physical Data:**  
*Mounting:* Surface with one #8 screw  
*Connection & Termination:* 0.25" quick connects

## OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Time Adjustment Method	Relay Output Form	Options
<b>Repeat-Cycle Off/On</b>	<b>TGK</b>	1 120 VAC	<b>VARIABLE TIME PERIODS</b> 0001 .1 to 1 sec. 0010 .1 to 10 sec. 0100 1 to 100 sec. 1000 10 to 1000 sec. Any range up to 24 hours available  <b>FIXED TIME PERIODS</b> Specify time in full seconds or hours followed by the letter "S" or "H" and the decimal amount of the main time unit. Examples: 5S5 is 5.5 seconds 5H5 is 5.5 hours	A Variable, integral, knob on timer.	1 SPDT	H 10 Amps
		2 230 VAC		B Variable, external, knob remote.	2 SPST	JN 15 Amps (1.0 HP)
		3 24 VAC		C Fixed, internal, factory set.	(N.O.)	J 20 Amps (1.5 HP)
		4 24-28 VDC		D Fixed, external resistor remote.	3 SPST (N.C.)	Z 30 Amps
		5 48 VAC		*4 DPDT	S Special	
		6 48 VDC				
		7 12 VDC				
		8 Any in between AC voltage (specify)				
		9 Any in between DC voltage (specify)				
		*10 Amps only				

*Specifications subject to change without notice.*